

TECHNICAL DATA SHEET



ACCESSORIES

● **TUBES :**



Ref. TC 5 x 8
Clear tube Ø 5 x 8, for permanent installation (m/l or 25 m).



Réf. TS 4 x 7
Silicone tube Ø 4 x 7 in black or white, for test instruments (m/l).

● **MANOMETER LIQUIDS :**



Ref. AWS 10 Density = 0,87. Bottles of : 20 ml, 30 ml, 125 ml, 250 ml, 500 ml, 1000 ml.

Ref. VOLT 1S Density = 1,86. Bottles of : 10 ml, 20 ml, 30 ml, 125 ml.

Ref. HG Density = 13,545. Bottles of : 10 ml, 20 ml, 30 ml, 125 ml.

Ref. VF 1 Density = 1. Bottles of : 20 ml, 30 ml, 125 ml, 250 ml, 500 ml, 1000 ml.

Ref. TETRA BROMURE Density = 2,96. Bottles of : 20 ml, 30 ml, 125 ml.

● **PRESSURE CONNECTIONS :**

Ref. KR 483



Connection kit with 2 quick connections n° 483 and 2 m of clear tube.



Ref. DP 447

Connection for double-shell wall, maximum thickness : 30 mm. Drilling diameter : 6 mm.



Ref. DP 339

Connection for double-shell wall maximum thickness : 80 mm. Drilling diameter : 6 mm.



Ref. 483


Quick-connection for wall without rear access. Drilling diameter : 10 mm.



Ref. 482

Simple connection with rear nut, M5 threading, length 15 mm. Drilling diameter : 5 mm.

Ref. PC. 482

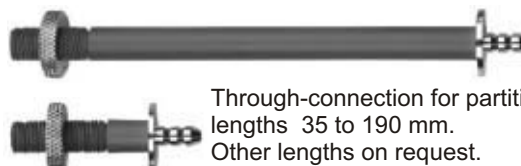

Through-connection for partitions standard lengths 35 to 190 mm. Other lengths on request. Drilling diameter : 11 mm.

● MANOMETERS CONNECTIONS :



Ref. 487

Simple connection in chromed brass for all type of manometers using AWS 10 and VOLT 1S.
Thread : 1/8 gas.



Ref. 509

Chromed brass safety connection, eliminating overspill on manometer using AWS 10 and VOLT 1S.
Thread : 1/8 gas.



Ref. 505

Valve connection in chromed brass for portable MT, KM, TJ and LU manometer using VOLT 1S liquid.
Thread : 1/8 gas.



Ref. 484

Simple connection in nylon for TJ and LU mercury manometers.
Thread : 1/8 gas.



Ref. 466

Simple connection in nylon for GF manometers, using VF1 and HG liquid.
Thread : 7 x 100.



Ref. 555 M/F

Male / female, 1/8 gas ball valve, for manometer isolation.



Ref. 555 F/F

Female / female, 1/8 gas ball valve, for manometer isolation.



Ref. 666

Male / female, 1/8 connection, air vent valve with a slide block to set the zero point without disconnecting the tubes.

● CONNECTIONS ACCESSORIES :



Ref. J.D.C

Straight connection for Ø 5 x 8 tube.



Ref. J.TC

T-connection for Ø 5 x 8 tube.



Ref. J.YC

Y-connection for Ø 5 x 8 tube.

● ACCESSORIES :

Ref. 494

Pressure tube, length 1 m for MT and KM manometers. With moulded ends.

Ref. GPN 900

Plug -8,5 A for all Ø 6,2 mm connections.
10 units bag.

Ref. FM-KS.10

Set of 2 magnetic fixings.

Ref. 648-FM

Safety reservoir, with magnetic fixings for mercury manometers.

Ref. 648-PF

Safety reservoir, permanent fixing for mercury manometers.

Ref. ALTU.

Altunet cleaning product, 500 ml bottle.

EXPORT DEPARTMENT

Tel : +33. 1. 60. 06. 69. 25 - Fax : +33. 1. 60. 06. 69. 29
site : www.kimo.fr e-mail : export@kimo.fr



Distributed by :

